


ROUND WALL LIGHT DATASHEET

1. PICTURE AND DIMENSION:

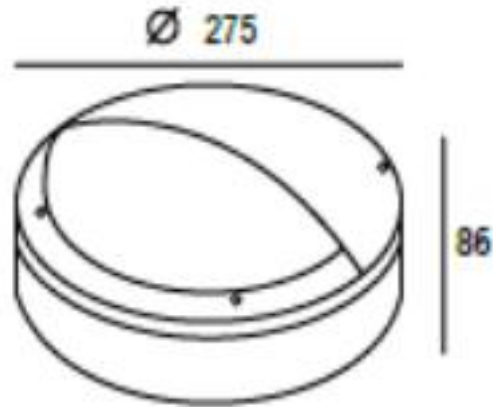

2. DESCRIPTION AND SPECIFICATION:

- . ITEM NO: 9710.E27.65
- . ITEM NAME : E27 ROUND WALL LIGHT
- . MATERIAL: DIECAST ALUMINUM BODY + PC DIFFUSER
- . LAMP: 1*E27 LAMPHOLDER (EXCLUDED THE LAMP)
- . DIMENSION: Ø275*H86MM
- . INPUT VOLTAGE: AC220V 50/60HZ
- . FINISH: OUTDOOR SATIN BLACK
- . IP65
- . WITH 25CM RUBBER 3*0.75MM²CABLE
- . INSIDE WITH THE MIRROR DIFFUSER
- . 304 SS SCREW OUTSIDE
- . 5 YEAR WARRANTY

Very thanks you to choose our products. Before install this product, pls carefully read this installation instruction, and keep it for the future reference

Outdoor Round Wall Light Manual of user

Summary


.Base function: Outdoor wall lighting with E27 lampholder

.Using place : Wall

.Techinal parameter:

Model no	Voltage	Frequency	Product Size	IP
9710.E27.65	AC220-240V	50/60HZ	Ø275*H86MM	65



Product Image and dimension

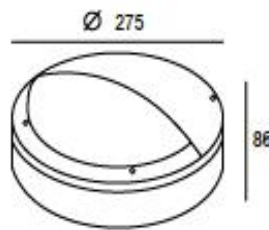

Warning using and installation in according with use of manual

.The input volatge should no exceed the rate voltage range(Rate voltage: AC220-AC240V 50/60HZ)

.The wall light can not be installed in the following palce:

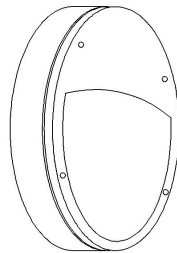

Inclinded place

.It is not possible to install the wall light above high temperature object.

.The wall light is not dimmed and cant not be used with dimmer

.Inspection and repair , pls entrust a professional to operate.

.When the wall light fails, pls cut off power quickly and link with manufacture.

Unfixed Wall Board

Installation

.Take out the product from the inner box.

.Open the cover and PC diffuser by disassemble the 4pcs screw

.Link the power line in the connector, if connection is wrong, it is easy

to casue fire, so firstconnect the GND before connect power lin

.Fix the base of product by 4pcs screws from the accessories b.

.Install the lamp into the lampholder properly

.Install the PC diffuser and cover by the 4pcs screws.

